



MODEL NO. 11.1032

LED Micro Switch with Built-In Flasher

THIS IS A POSITIVE SWITCHED FLASHER FOR LED LIGHTS ONLY


GENERAL INFORMATION:

Input voltage - +13.8v
Max. Amp Draw- 1 amp per output

The use of a 5 amp fuse between the power source and the flasher is recommended.

INSTALLATION INSTRUCTIONS:

1. Determine location where the Flasher (Shown in diagram below) will be mounted. Use the two Double sided tape strips #11.6051 (included) to mount where desired.
2. Wire the LED flasher as shown in the diagram below. **Output Ground wire must be a common ground for all LED lights.**

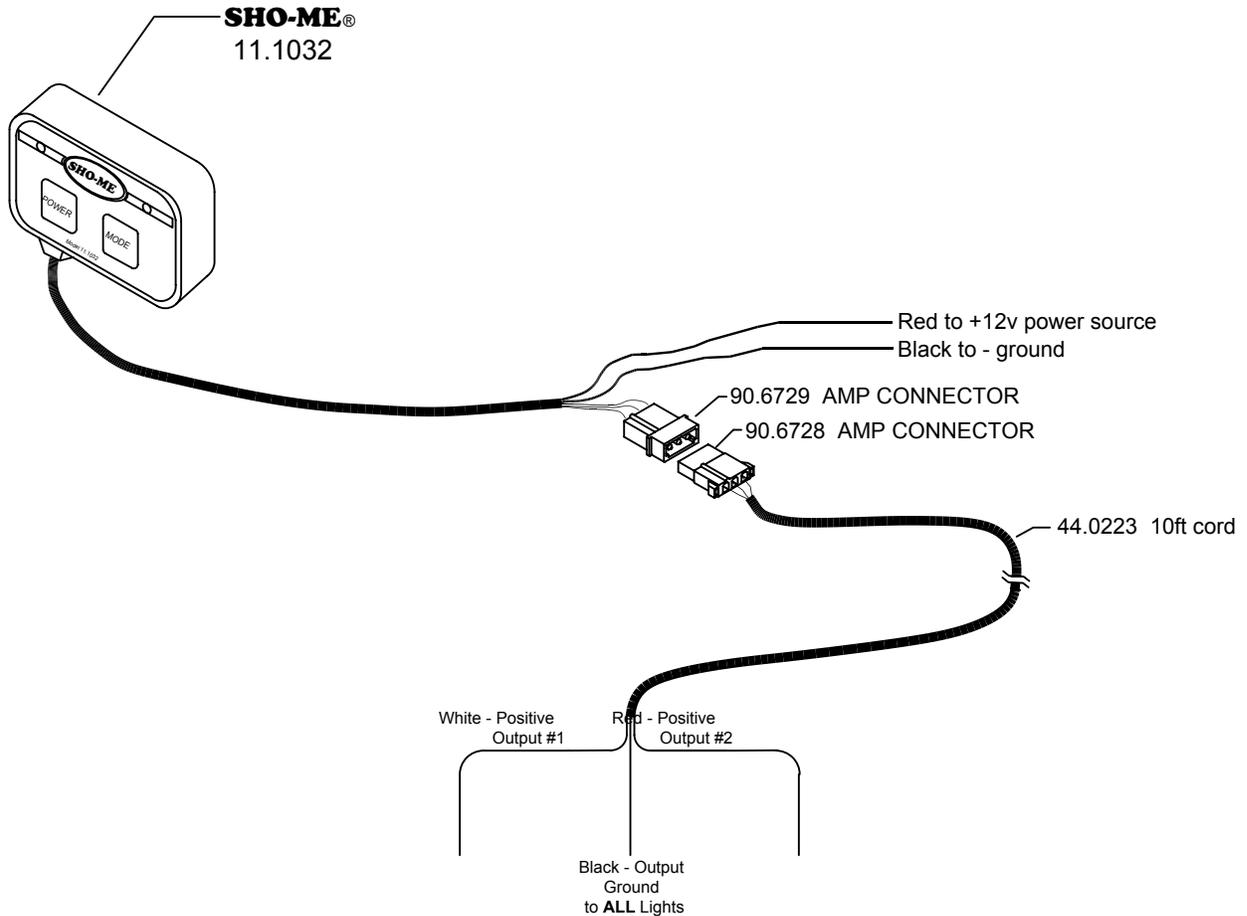

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
 U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
 E-mail: sales@able2products.com WEB: www.able2products.com