



MODEL NO. 11.3704 LED Mighty Mite Kit

GENERAL INFORMATION:

Connect LED lights (Model No. 11.8004) to solid-state flasher (Model No. 11.1005). After connecting the LED lights to flasher, connect flasher to switch (Model No. 11.1002). Use of an in-line 3 amp fuse is recommended between power source and switches. **NOTE: LED lights must be connected to a Flasher.** If it is connected directly to 12V (steady burn) it will over heat and void warranty.

INSTALLATION INSTRUCTIONS:


Find location where the LED lights will be mounted, mark holes to be drilled. Mount the LED light with screws that are included or use Scotch Brand™ VHB tape. After mounting in desired location connect ribbed side of wire to flasher. Then attach smooth side of wire to ground, as shown in diagram below.

FLASHER INFORMATION:

The LED Flasher Model 11.1005 features 7 flash patterns. To change flash patterns, push and hold mode button down until flashing stops, then release for next flash pattern. When shipped from Able 2 Products Company, it is set on Automatic random Select (Pattern 7).

FLASH PATTERNS

- | | |
|------------------------|--------------------------------|
| 1. Single Simultaneous | 5. Variable Speed Alternating |
| 2. Double Simultaneous | 6. Variable Speed Simultaneous |
| 3. Quad Simultaneous | 7. Automatic Random Select |
| 4. Single Alternating | |

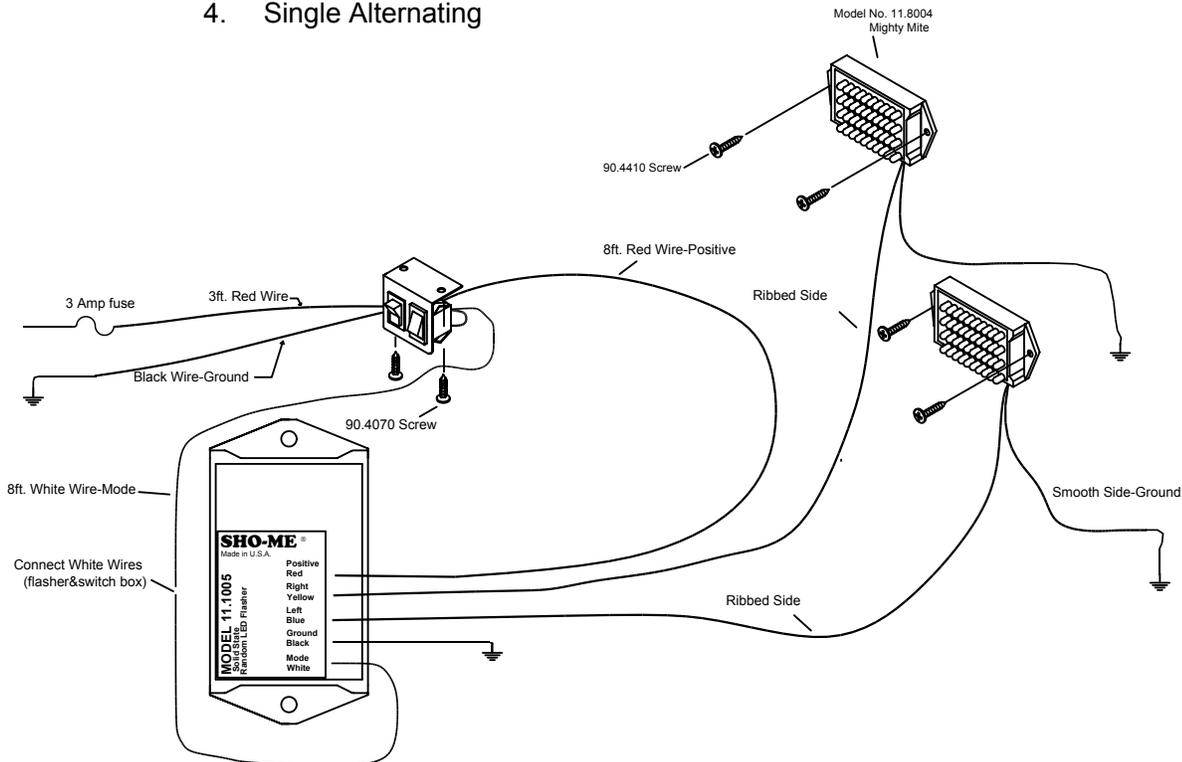

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com