




MODEL NO. 11.1400  
Permanent Mount Low Profile  
LED Mini Bar

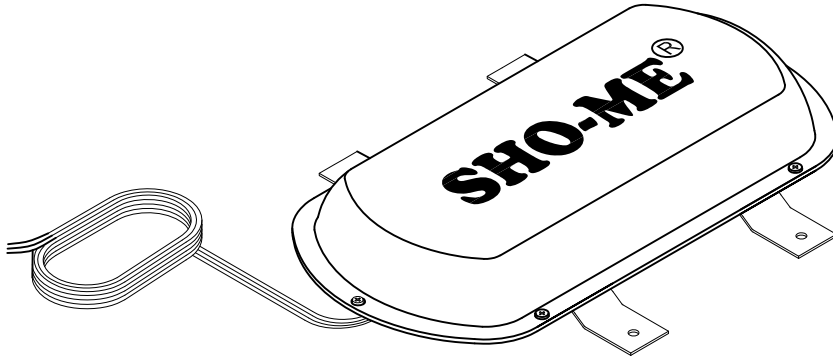

**GENERAL INFORMATION:**

The **SHO-ME**® Low Profile LED Mini Bar is equipped with a Solid State Flasher. The flasher has 7 flash patterns including random. Connect the Red wire to a switched positive (+12v), the Black wire to negative (-Ground), and the White LED mode wire to a momentary switched +12v.

**LED FLASH PATTERNS**

Double Alternating	Double Simultaneous
Quad Alternating	Quad Simultaneous
Quint Alternating	Random
Mega Alternating	

**INSTALLATION INSTRUCTIONS:**

Determine location to mount your Low Profile LED Mini Light Bar. Do not install this product or route any wires in the deployment area of your air bag. Equipment mounted or located in the air bag deployment area will damage or reduce the effectiveness of the air bag, or become a projectile that could cause serious personal injury or death. Refer to your vehicle owners manual for the air bag deployment area. The User/Installer assumes full responsibility to determine proper mounting location, based on providing ultimate safety to all passengers inside the vehicle.

When drilling holes to mount this product, the installer **MUST** be sure that no vehicle components or other vital parts could be damaged by the drilling process. Check both sides of the mounting surface before drilling begins. Also deburr any holes and remove any metal shards or remnants. Install grommets into all wire passage holes.

Use only soap and water to clean the outer lens. Use of other chemicals could result in premature lens cracking (crazing) and discoloration. Lenses in this condition have significantly reduced effectiveness. Inspect and operate this product regularly to confirm its proper operation and mounting condition. **Do not use a pressure washer to clean this product.**



**PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625**  
**U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240**  
**E-mail: sales@able2products.com WEB: www.able2products.com**