



MODEL NO. 11.8600SF Waterproof LED Slim Light

GENERAL INFORMATION:

Connect LED Slim Light, Model 11.8600SF to solid state flasher, Model No. 11.1005SF. After connecting the LED Slim Light to flasher, connect flasher to switch (Not included). Use of an inline 3 amp fuse is recommended between power source and switches. **NOTE: LED Slim Light must be connected to a flasher.** If connected directly to +12v (steady burn) it will over heat and void warranty.

INSTALLATION INSTRUCTIONS:


Use the L brackets (included) to mount the light. Vary the height of the light by positioning the longer side of the L bracket flat against the mounting surface for a lower height; position the shorter side of the L bracket flat against the mounting surface for a higher height. After mounting LED Slim Light, wire according to the diagram below.

FLASHER INFORMATION:

The LED Flasher Model 11.1005SF features 7 flash patterns. To change flash patterns apply +12v to White wire on flasher momentarily until flashing stops, then release for next flash pattern. When shipped from Able-2 Products Company, it is set on Automatic Random Select. (Pattern 7).

FLASH PATTERNS

- | | |
|-----------------------|----------------------------|
| 1. Double Alternating | 5. Double Simultaneous |
| 2. Quad Alternating | 6. Quad Simultaneous |
| 3. Quint Alternating | 7. Automatic Random Select |
| 4. Mega Alternating | |

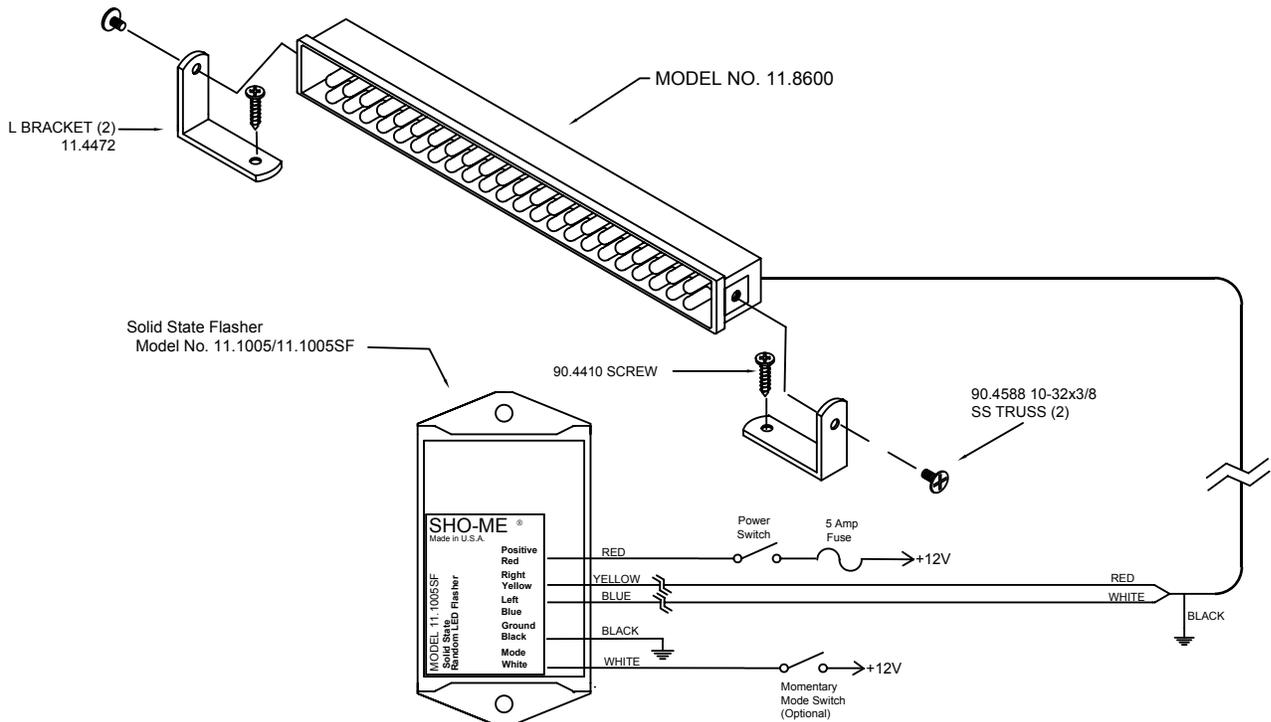

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
 U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
 E-mail: sales@able2products.com WEB: www.able2products.com