



**MODEL NO. 11.8200 Series
LED "By The Inch" Light
(Positive Switched)**

GENERAL INFORMATION:

NOTE: LED "By The Inch" Light must be wired to a flasher, such as 11.1005 or 11.1005SF. If it is connected directly to 12V (steady burn) it will over heat, and void warranty.


PRODUCT SPECIFICATIONS:

Optimum Input Voltage:	+13.8 VDC
Operating Current:	.04 amps per inch
Recommended Fuse:	3 amps


INSTALLATION INSTRUCTIONS:

(1"-2" Lights use double stick tape) Keep in mind air bag deployment area. Attach "L" brackets in desired location. For lower height attach with long side of "L" bracket on mounting surface. For higher height mount with short side of "L" bracket on mounting surface. Attach clip bracket to "L" bracket with one 10-24 x 1" flathead bolt. Remove backing from foam pad and place pad over bolthead. Snap your new **SHO-ME**® By-The-Inch Light into the clip brackets. After mounting to the desired location, wire according to diagram below.

Single Section Wiring

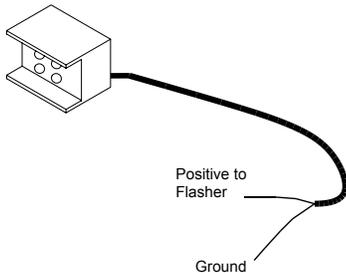

Multiple Section Wiring

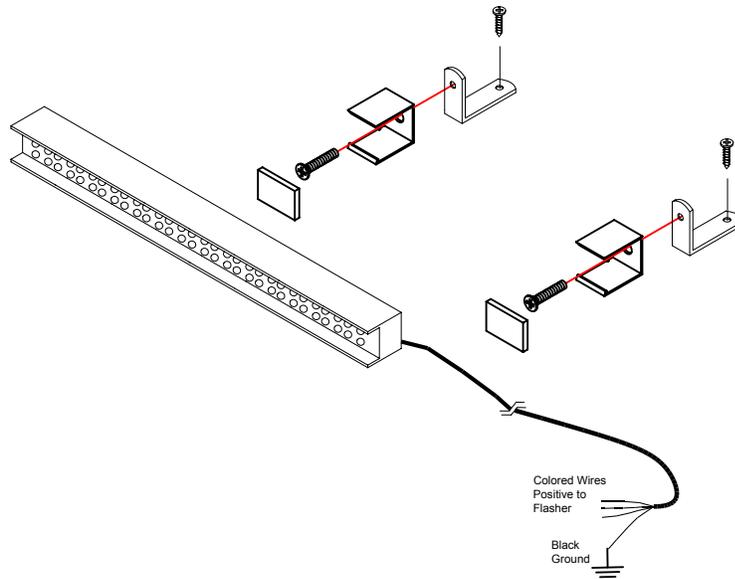

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com