



**MODEL NO. 11.8400 Series  
Bendable LED "By The Inch" Light  
(Ground Switched)**

**GENERAL INFORMATION:**


**NOTE:** LED "By The Inch" Light must be wired to ground a switching flasher. If it is connected directly to 12V (steady burn) it will overheat, and void warranty.

**PRODUCT SPECIFICATIONS:**

Optimum Input Voltage:	+13.8 VDC
Operating Current:	.04 amps per inch
Recommended Fuse:	3 amps

**INSTALLATION INSTRUCTIONS:**

Locate desired mounting location for "By The Inch" light. Keep in mind air bag deployment area. Use the "L" brackets (1-2 inch lights use double stick tape) to mount LED Light. Vary the height of the LED Light by positioning the longer side of the "L" bracket flat against the mounting surface for lower height. Position the shorter side of the "L" bracket flat against the mounting surface for a higher height. After mounting to the desired height, wire the light according to the label on the back of the light.

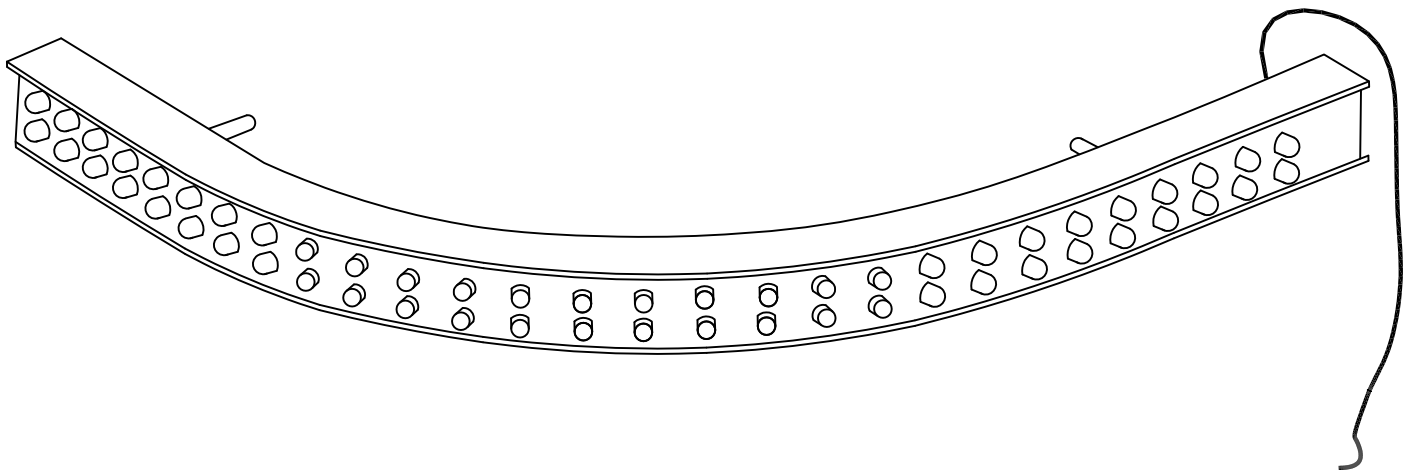

**PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625**  
**U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240**  
**E-mail: sales@able2products.com WEB: www.able2products.com**