



Model No.  
11.9000 Black / 9010 Aluminum  
11.9200 Black / 9210 Aluminum  
Single or Bi-Color LED Micro-Lite

**GENERAL INFORMATION:**

**NOTE:** Must be connected to a flasher, such as 11.1005, 11.1005SF, or 11.1032. If it is connected directly to 12V (steady burn) it will over heat, and void warranty.

**INSTALLATION INSTRUCTIONS:**







**1a. LED Micro-Lite Installation With Bracket**

Attach the bracket to desired location using the (2) longer screws.  
Drill out the mounting hole, Point A, on each end of the LED Micro-Lite.  
Then place the Micro-Lite into the bracket and attach it using the shorter screws and locknuts. The gasket will not be needed.

**1b. LED Micro-Lite Installation Without Bracket**

Use Point B. Drill the (2) holes on the mounting surface for the LED Micro-Lite using the light as a guide.  
Place the gasket under the LED Micro-Lite. Attach the LED Micro-Lite using (2) longer screws provided.

**2. Wire LED Micro-Lite to flasher.**

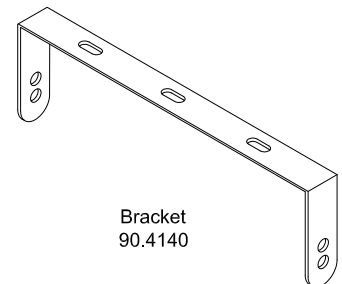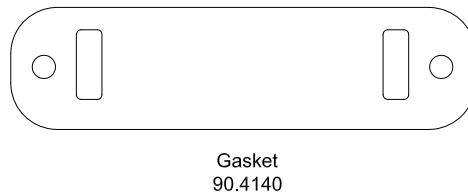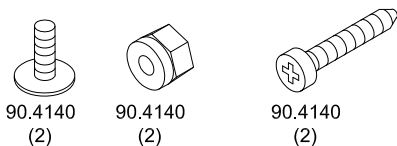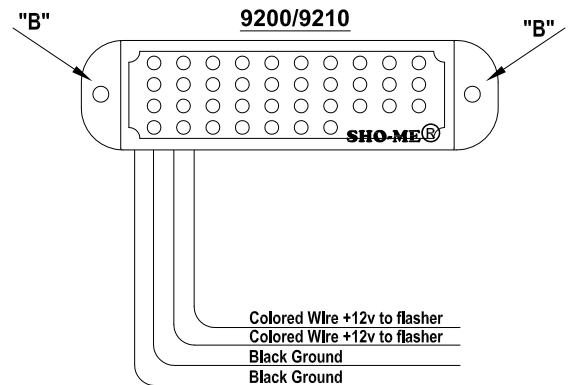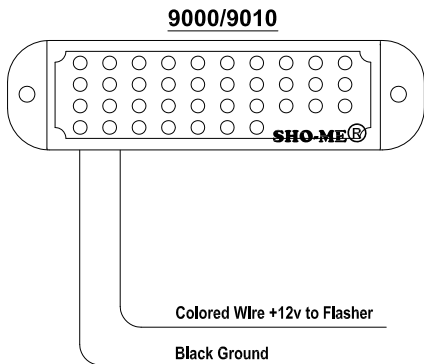

**PRODUCTS COMPANY** 804 East Hwy 248 Cassville, MO 65625  
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240  
E-mail: sales@able2products.com WEB: www.able2products.com