



Mounting Instructions
 11.9264 Black LED Micro-Lite Kit
 11.9274 Aluminum LED Micro-Lite Kit
 11.9284 Aluminum / Black LED Micro-Lite Kit
 (with 11.1005 or 11.1005SF LED Flasher)

A. Unpacking

Remove the (4) LED Micro-Lites, the LED Double Switch, the LED Flasher and all associated screws and locknuts.

B. Installation

1a. LED Installation With Bracket

Attach the brackets to their desired location using the (8) longer screws. Cut out the recessed hole Point A on each end of the LED Micro-Lites. (**NOTE:** The recessed holes can only be seen from the bottom of the LEDs.) See Figure 1. Then place the Micro-Lites into the brackets and attach them using the shorter screws and locknuts. The (4) gaskets will not be needed.

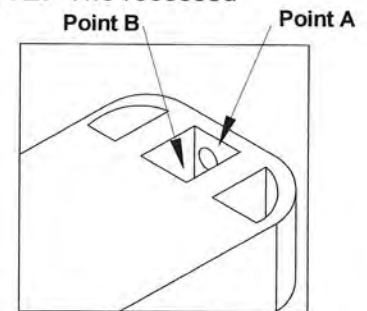



Figure 1

1b. LED Installation Without Bracket

Cut out the recessed hole Point B on each end of the LED Micro-Lites. (**NOTE:** The recessed holes can only be seen from the bottom of the LEDs.) See Figure 1. Drill the (8) holes on the mounting surface for the (4) LED Micro-Lites using an LED Micro-Lite as a guide. Place the (4) gaskets under the LED Micro-Lites. Attach the LED Micro-Lites using the (8) longer screws provided. The (4) brackets, (8) shorter screws and (8) locknuts will not be needed.

2. Mount the 11.1005SF or 11.1005 LED Flasher using the (2) provided screws.
3. Mount the 11.1002 LED Double Switch using the (2) provided screws.
4. Connect the wires. (See Diagram 1 below.)
5. Connect switch wires to terminals on back of switch. (See Diagram 2 on next page.)
6. Connect the fused red wire to a +12V power source.

Diagram 1

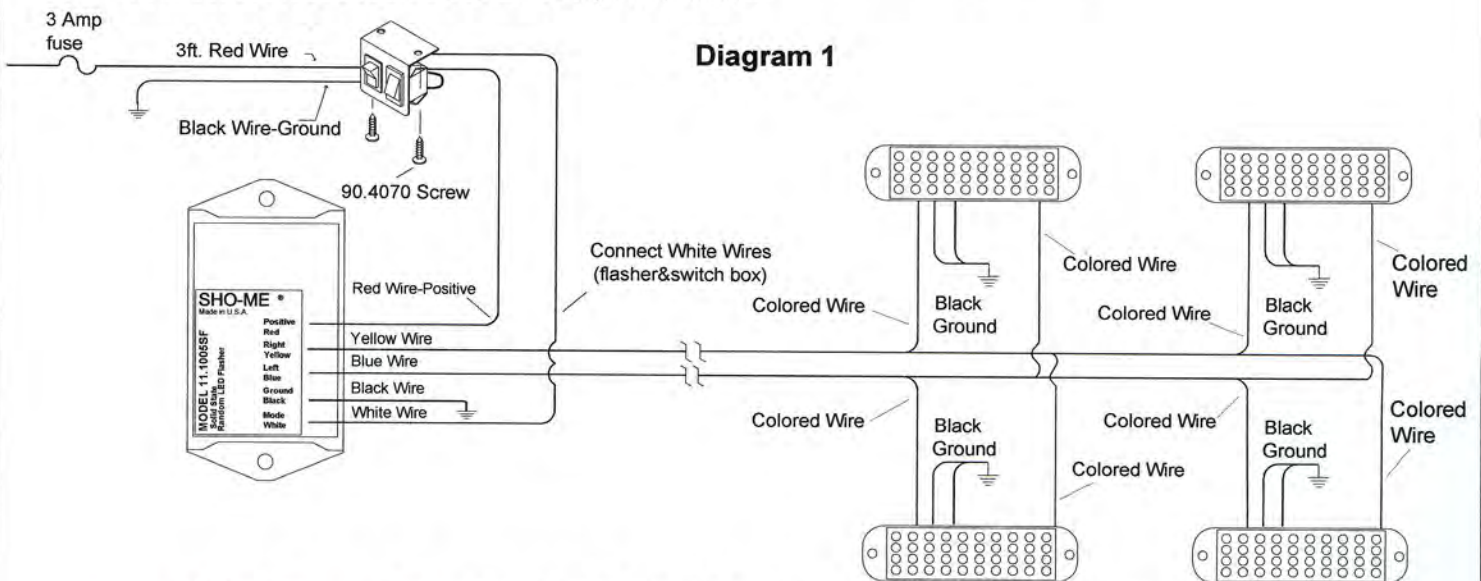

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
 U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
 E-mail: sales@able2products.com WEB: www.able2products.com

Diagram 2

