



MODEL NO. 12.5023  
Luminator Interweave LED Light

**GENERAL INFORMATION**


**NOTE:** Luminator Interweave LED Light must be connected to a flasher, such as 11.1005, 11.1005SF, or 11.1032. If it is connected directly to 12V (steady burn) it will over heat, and void warranty.

**PRODUCT SPECIFICATIONS**

Optimum Operating Voltage: +13.8 VDC  
Operating Current: 1.5 amps  
Recommended Fuse: 5 amp

**INSTALLATION INSTRUCTIONS**

Use the "L" brackets (included) to mount the LED Light. Vary the height of the LED Light by positioning the longer side of the "L" bracket flat against the mounting surface for a lower height. Position the shorter side of the "L" bracket flat against the mounting surface for a higher height. After mounting to the desired height, connect to the flasher, as shown in the diagram below. When wiring, connect Red wire to one output on flasher, connect White wire to other output on flasher and Black wire to ground.

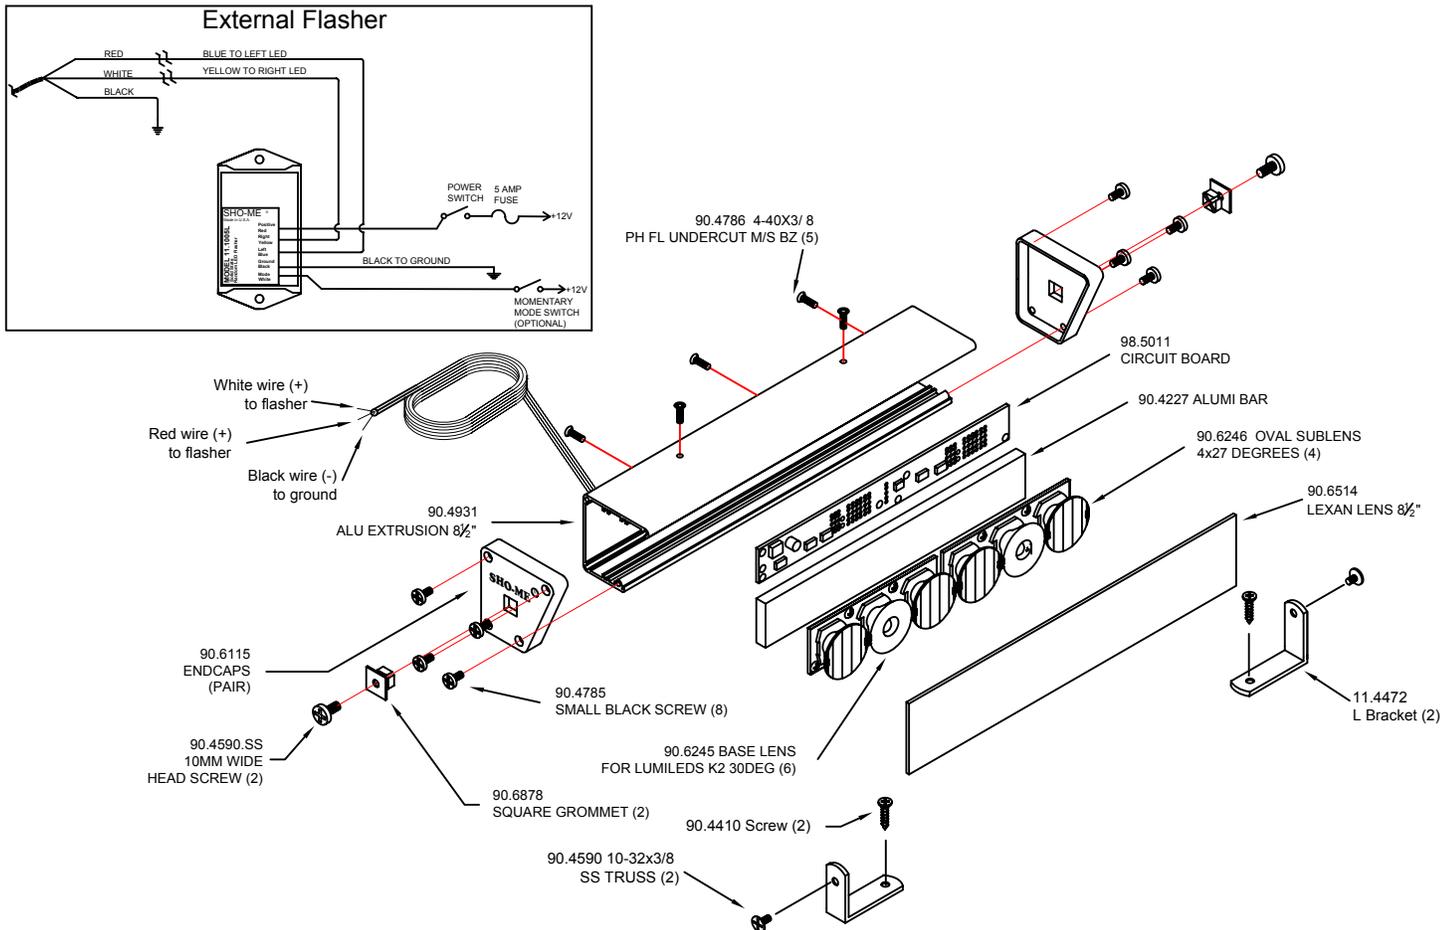

**PRODUCTS COMPANY** 804 East Hwy 248 Cassville, MO 65625  
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240  
E-mail: sales@able2products.com WEB: www.able2products.com