

LED Signal Stick MODEL NO. 12.6206

GENERAL INFORMATION

The LED Signal Stick alerts traffic in the direction they need to follow. The Signal Stick comes complete with controller (Model No. 11.1006). The controller has an ON/OFF Switch, Rotary Switch and Speed Control Dial. **NOTE:** Shielded wire must be grounded at the Controller. The LED Signal Stick has twelve flash patterns from which to choose:

- 1. Random Flash (Patterns 2-7)
- 2. Quad Flash 2-2
- 3. Quad Flash 3-3
- 4. Double Flash 2-2

- 5. Double Flash 3-3
- 6. Center 2 Outer 1
- 7. Left 3 Right 3
- 8. Center Out


- 9. Right * w/Double Flash
- 10. Right
- 11. Left * w/Double Flash
- 12. Left

INSTALLATION INSTRUCTIONS

Use the L - brackets (included) to mount the light. Slide the hex bolts provided into the t-slot as shown in the Figure A below . The light can be mounted using the bottom or rear t-slots . Always mount with the bottom t-slot down, this is to to allow any moisture that enters the light housing to drain properly.

WIRING INSTRUCTIONS

Black wire to Ground, Red wire to Positive +12V. Yellow wire activates the signal stick in a Random Flash Pattern when +12v is applied. When operating signal stick with controller, All Signal Stick functions will override the Random Flash.

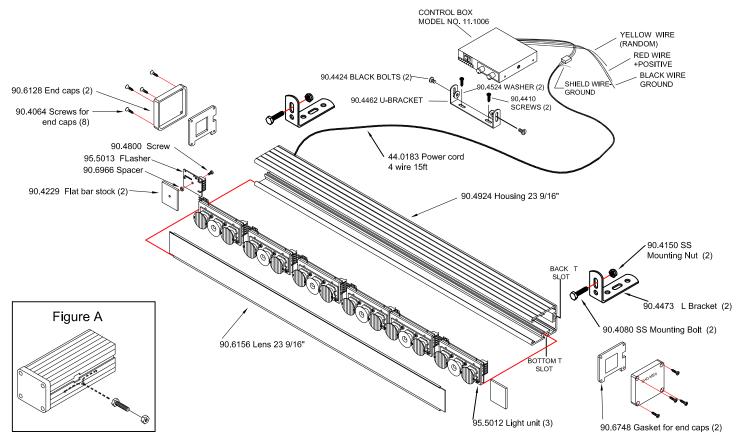



PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625

U.S. and Canada Toll Free Numbers Phone: 800-641-4098 **FAX**: 800-526-1240

E-mail: sales@able2products.com **WEB:** www.able2products.com