

SHO-ME[®] Alternating Flashing Lights Model No. 17.0842


ELECTRICAL CONNECTIONS

1. Connect 3 ft. **ORANGE** or **RED** wire to +12 volts
2. Connect 8 ft. wire to lamp on driver's side using blue splice enclosed
3. Connect 12 ft. wire to lamp on passenger side using blue splice enclosed

MECHANICAL CONNECTIONS

1. Connect switch and flasher assembly underneath dash with screws provided
2. Lamp may be connected using mounting brackets on each lamp

NOTE: Mounting brackets provide ground when mounted on frame. When mounting in back window, ground wire must be attached to light mounting stud.

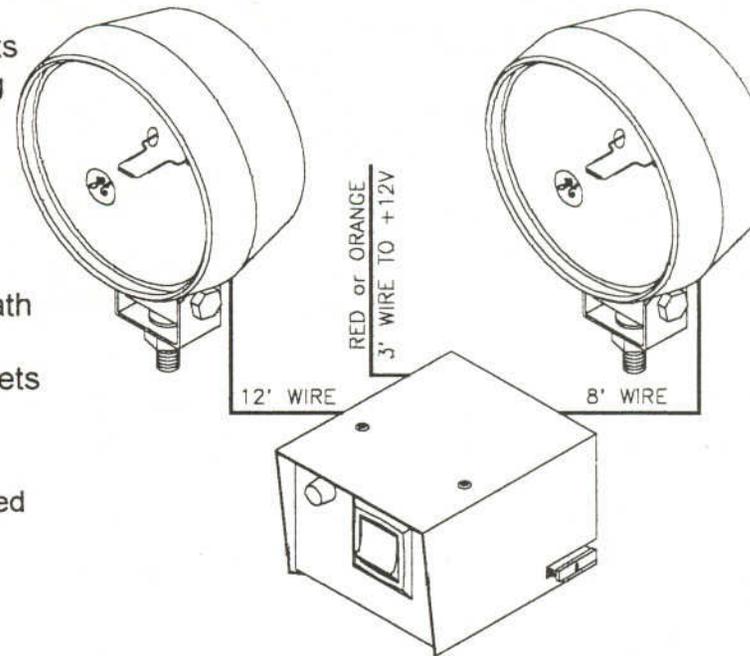

Able 2

PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625
U.S. and Canada TOLL FREE NUMBERS • Phone 800-641-4098 FAX 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com