



MODEL NO. 30.7100
Speaker Bracket

INSTALLATION INSTRUCTIONS


1992-94 Crown Victoria

General:

The 30.7100 bracket allows a standard siren speaker to be mounted behind the bumper of a 92-94 Crown Vic without any drilling. Bracket will allow speaker to mount in a horizontal position for maximum sound performance from the speaker.

Instructions:

1. Mount 30.7100 to lower radiator support frame which is located directly behind license plate/bumper (same frame support vehicle's horns are mounted). The flat plate with 4 holes mounts on back of lower radiator support frame and the angle bracket (7 hole) mounts on the front side of lower radiator support frame, using the four 1/4" bolts and nuts supplied. Bolt the two brackets together.
2. Speaker driver mounts to the existing 3 holes on the lower portion of the angle bracket.

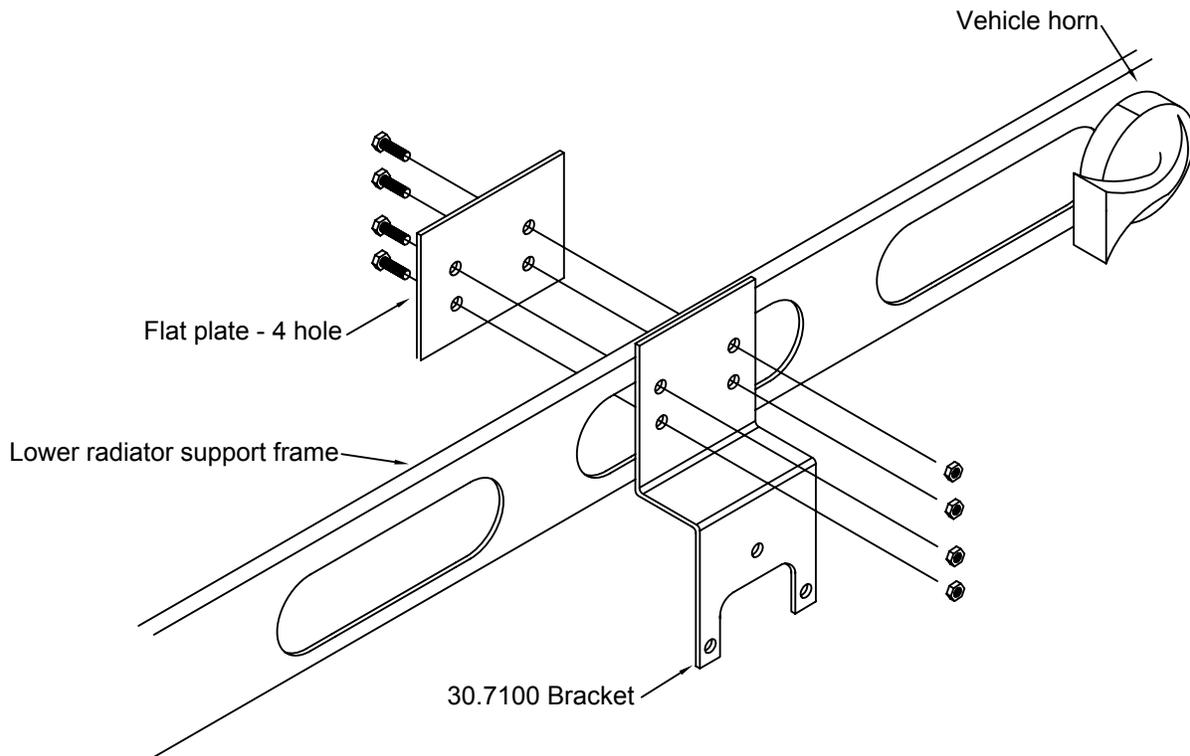

Parts List

- 1.) Flat Plate 4 hole
- 2.) Angle Bracket 7 hole
- 3.) 4- 1/4" x 3/4" Bolts
- 4.) 4- 1/4" Kepps Nuts



PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com