



MODEL NO. 30.7220
Speaker Bracket


INSTALLATION INSTRUCTIONS

1995-1998 Chevrolet Lumina

This bracket allows a standard siren speaker to be mounted under the hood with speaker facing forward for maximum sound performance.

Instructions:

1. Open Hood
2. Remove black plastic cover in front of radiator.
3. Under this black plastic notice the metal part of the front bumper, on the passenger side mount the bracket with the mount label facing up, bracket should butt against 2 plastic strips of the rubber bumper cover.
4. Drill two $\frac{1}{4}$ " holes and bolt mounting bracket to metal bumper.
5. Mount speaker driver on top of bracket (bolts go in from under side of bracker and driver on top).
6. Use scoop style horn and face forward.

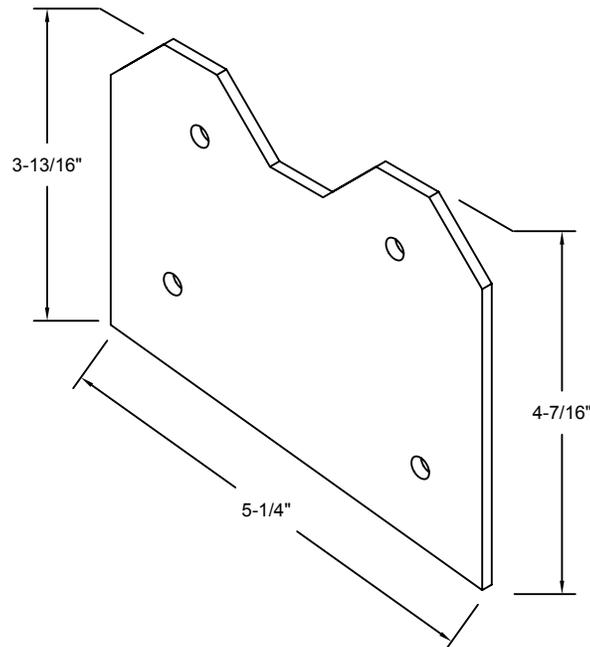

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com