




MODEL NO. 11.2005 / 2005P
LED Light
GENERAL INFORMATION

Note For exterior, use Model 11.2005p

Installation Instructions

Use the L brackets (included) to mount the LED light. Vary the height of the LED light by positioning the longer side of the L bracket flat against the mounting surface for a lower height. Position the shorter side of the L bracket flat against the mounting surface for a higher height. After mounting in desired location, connect ribbed wire to solid-state flasher, Model No. 11.1005, 11.1005SF, or 11.1022. Connect smooth wire to ground.

After connecting the LED light to a flasher, connect flasher to switch, Model No. 11.1002 or 11.1012 (Not needed if using 11.1022). Use of an in-line 3 amp fuse is recommended between power source and switches. NOTE: LED light **must** be connected to a Flasher. If it is connected directly to 12V (steady burn) it will over heat and void warranty.

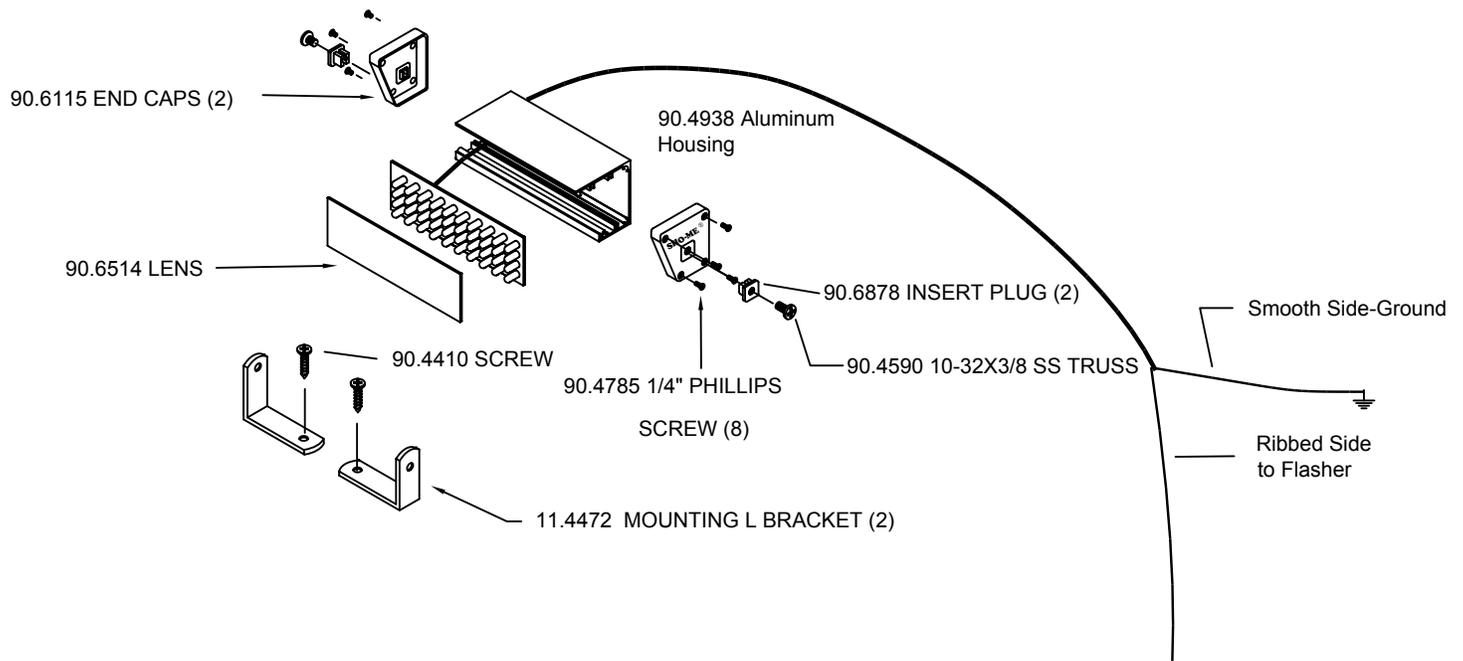

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com