



MODEL NO. 11.2741CH
Chameleon
LED Signal Stick

GENERAL INFORMATION

The LED Chameleon Signal Stick alerts traffic in the direction they need to follow while giving you the option of Red and Blue warning lights in the same signal stick. The Chameleon Signal Stick (Model 11.1041CH) comes complete with controller (Model No. 11.1000CH). The LED Stick has twelve flash patterns from which to choose:


- | | |
|--|-----------------------------------|
| 1. Random Flash - Amber | 7. Double Flash Alt. Ends - Amber |
| 2. Right Arrow Chaser - Amber | 8. Random Flash - Red/Blue |
| 3. Right Arrow Chaser/Dbf. Flash End - Amber | 9. Random Flash - Red/Blue/Amber |
| 4. Left Arrow Chaser - Amber | 10. Scan - Red/Blue/Amber |
| 5. Left Arrow Chaser/Dbf. Flash End - Amber | 11. Alternating - Red/Blue/Amber |
| 6. Center Out - Amber | 12. Quad Alternating - Red/Blue |

INSTALLATION INSTRUCTIONS

Use the L - brackets (included) to mount the LED Signal Stick. To install mounting bolts to the Signal Stick, remove the 4 screws from the end cap and install the mounting bolts into the desired t-slot as shown in drawing, then re-install the end cap.

WIRING INSTRUCTIONS:

Black wire to Ground, Red wire to Positive +12V and Yellow wire to Spst Toggle switch +12v DC (Optional). Yellow wire activates the signal stick in a Random Flash Pattern when +12v is applied. When operating signal stick with controller, All Signal Stick functions will override the Random Flash.

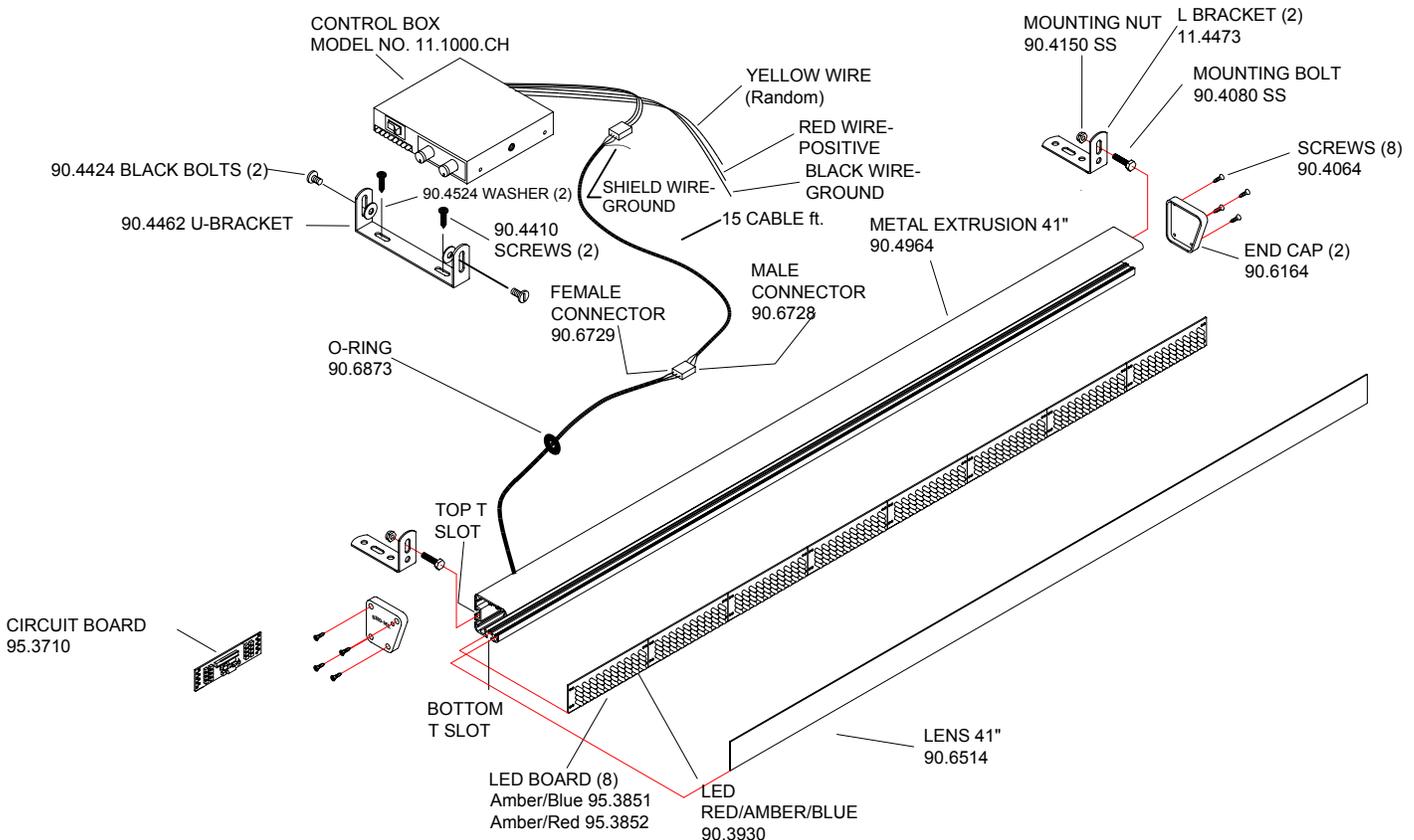

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com