



LIGHT STORM[®]

LED Signal Stick

MODEL NO. 12.6208

GENERAL INFORMATION

The LED Signal Stick alerts traffic in the direction they need to follow. The Signal Stick comes complete with controller (Model No. 11.1000). The controller has an ON/OFF Switch, Rotary Switch and Speed Control Dial. **NOTE:** Shielded wire must be grounded at the Controller. The LED Signal Stick has twelve flash patterns from which to choose:


- | | | |
|----------------------------------|---------------------|---------------------------|
| 1. Random Flash - (Patterns 2-7) | 5. Double Flash 4-4 | 9. Right * w/Double Flash |
| 2. Quad Flash 2-2 | 6. Center 2 Outer 2 | 10. Right |
| 3. Quad Flash 4-4 | 7. Left 4 Right 4 | 11. Left * w/Double Flash |
| 4. Double Flash 2-2 | 8. Center Out | 12. Left |

INSTALLATION INSTRUCTIONS

Use the L - brackets (included) to mount the 12.6208 light. To install mounting bolts to the signal stick, remove the 4 screws from the end cap and install the mounting bolts into the desired t-slot as shown in drawing. Re-install the end cap.

WIRING INSTRUCTIONS

Black wire to Ground, Red wire to Positive +12V. Yellow wire activates the signal stick in a Random Flash Pattern when +12v is applied. When operating signal stick with controller, All Signal Stick functions will override the Random Flash.

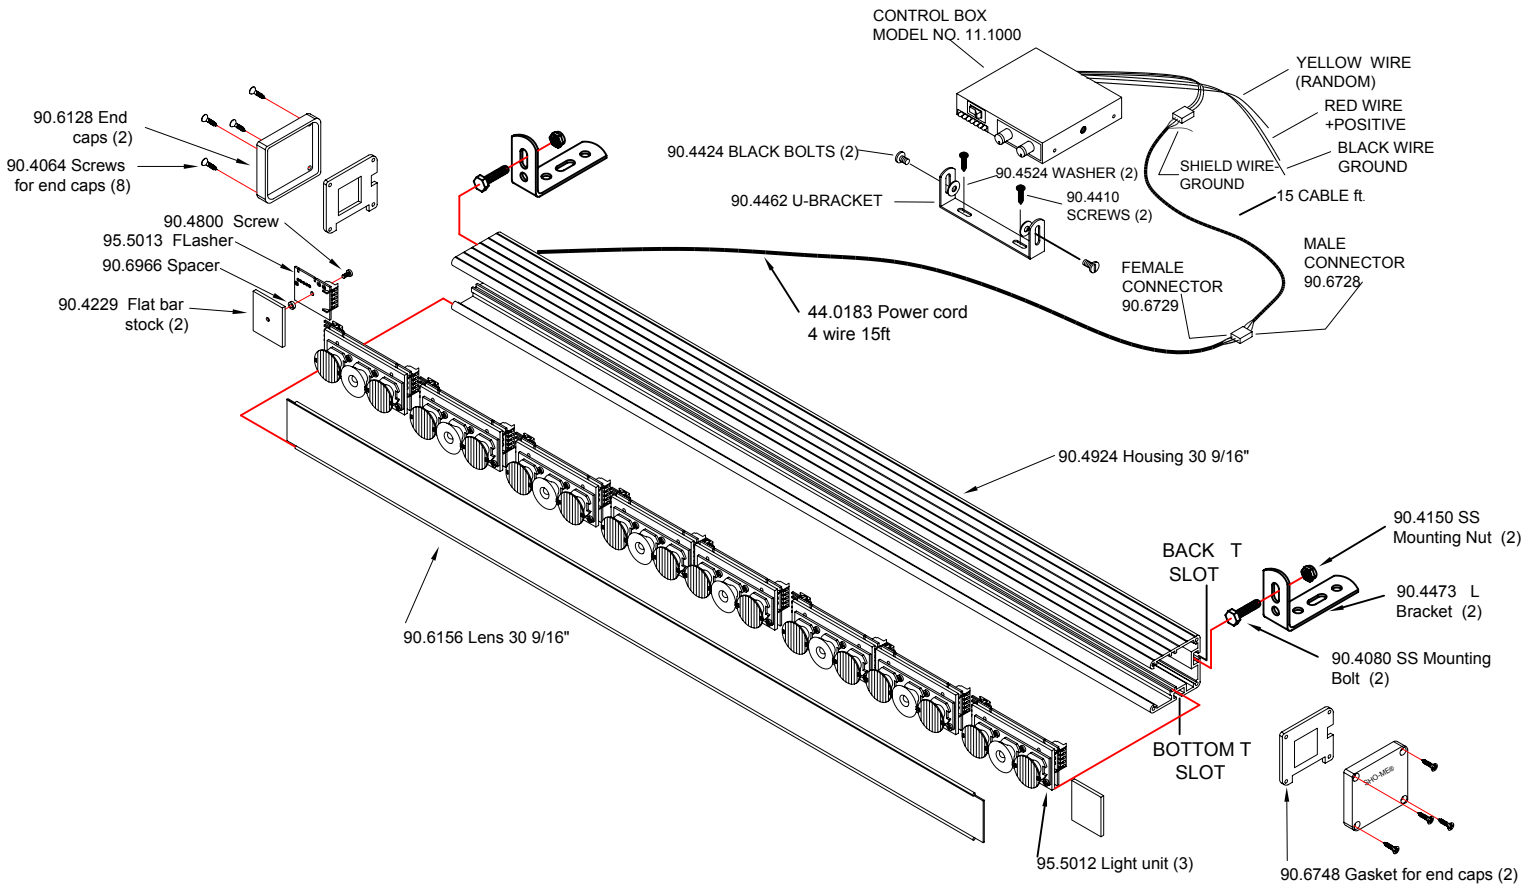

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
 U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
 E-mail: sales@able2products.com WEB: www.able2products.com