SHO-ME®

Model No. 11.8200F Series LED "By The Inch" Light With Built in Flasher

GENERAL INFORMATION:

NOTE: The 11.8200F Series LED "By The Inch" Lights have a built in flasher with selectable flash patterns. To change the flash pattern connect the White mode wire to a +12v Momentary switch. Connect the Red wire to positive +12v DC and the Black wire to -Ground.

PRODUCT SPECIFICATIONS:


Optimum Input Voltage: +13.8 VDC

Operating Current: .04 amps per inch

Recommended Fuse: 3 amps

INSTALLATION INSTRUCTIONS:

Locate desired mounting location for "By The Inch" light. Keep in mind air bag deployment area. Use the "L" brackets (1-2 inch lights use double stick tape) to mount LED Light. Vary the height of the LED Light by positioning the longer side of the "L" bracket flat against the mounting surface for lower height. Position the shorter side of the "L" bracket flat against the mounting surface for a higher height. After mounting to the desired height, connect, as shown in the diagram below.

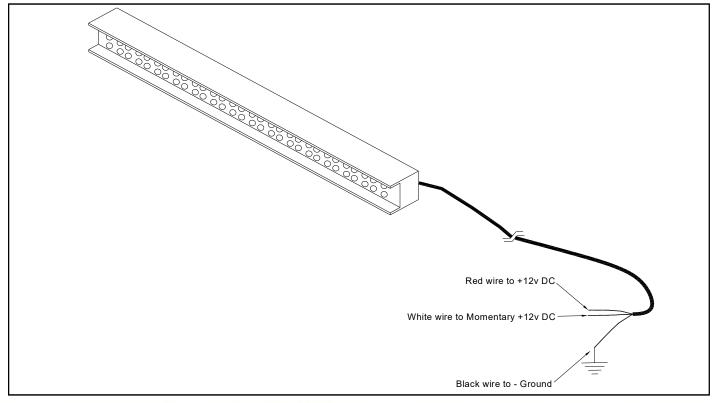



PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625
U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com