




MODEL NO. 11.1193
Permanent Mount Low Profile
LED Mini Bar

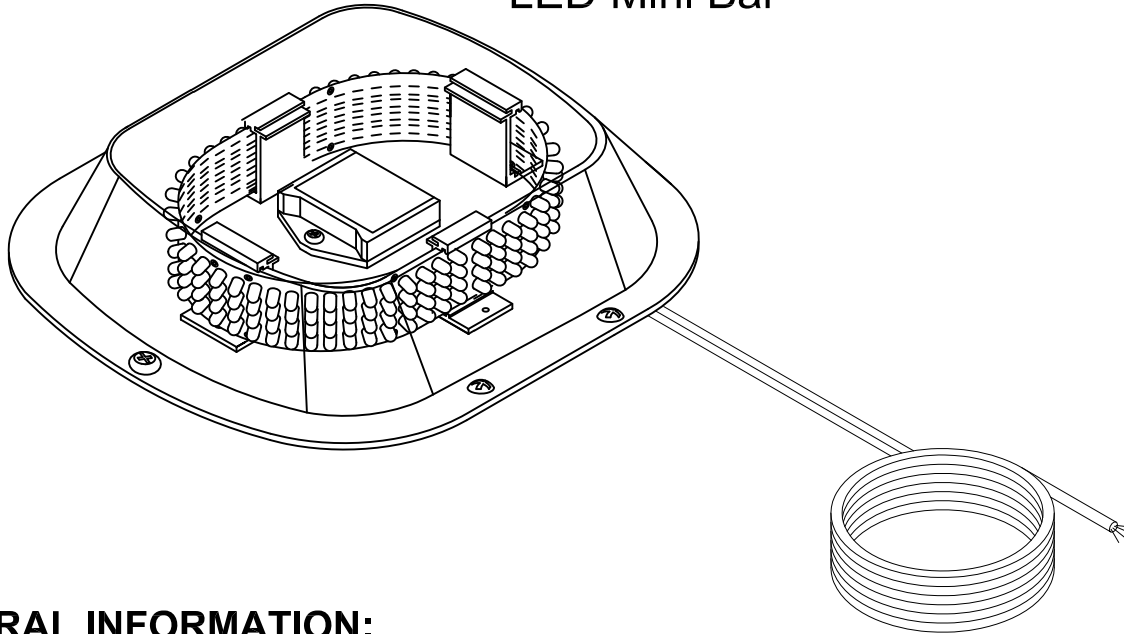

GENERAL INFORMATION:

The **SHO-ME**® Low Profile LED Mini Bar is equipped with a Solid State Flasher. The flasher has 7 flash patterns including random. To change flash patterns momentarily apply +12v to the white, mode wire. Each time +12v is applied, the flash pattern will change.

FLASH PATTERNS

Alternating - Double Flash
Alternating - Quad Flash
Alternating - Quint Flash
Simultaneous - Double Flash

Simultaneous - Quad Flash
Alternating - MEGA Flash
Random

INSTALLATION INSTRUCTIONS:

Determine location to mount your Low Profile LED Mini Light Bar. Attach bolts to bottom of your **SHO-ME**® Low Profile LED Mini Bar. Keep in mind airbag deployment area and any other obstacles. Run wire inside of vehicle and connect to switch. A momentary switch is required to change flash patterns.

Connect the Green wire to +12v DC , Connect the Black wire to - Ground , Connect the White wire to momentary +12v .



PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625
U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com