




MODEL NO. 12.1257
Permanent Mount
Luminator LED Stretch Bar

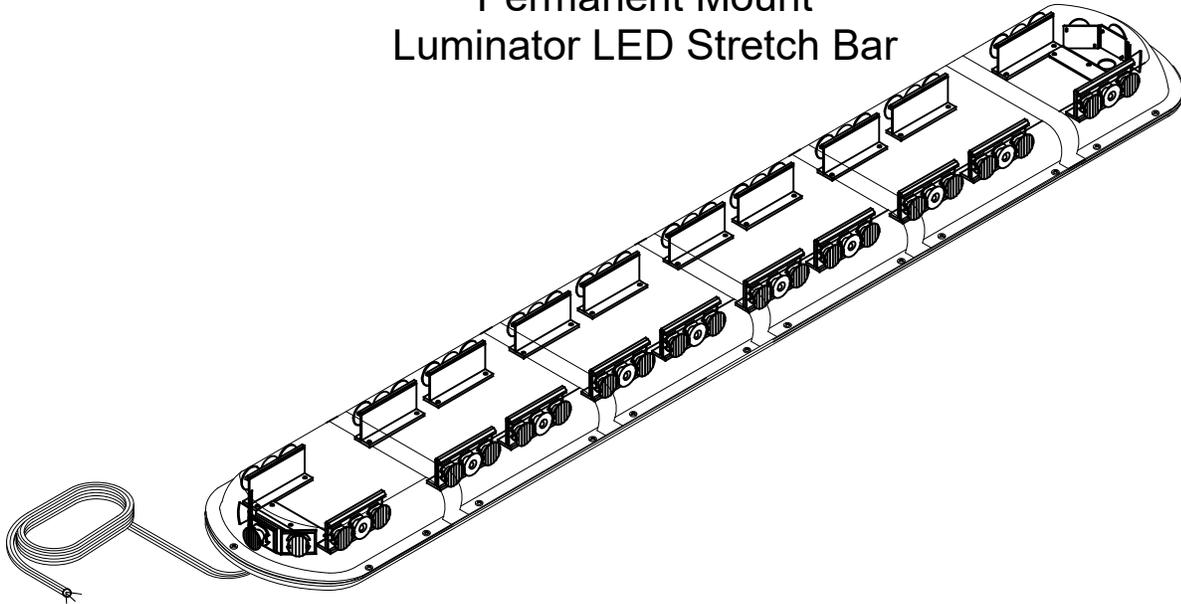

GENERAL INFORMATION:

The **SHO-ME**® Luminator LED Stretch Bar is equipped with a Solid State Flasher. The flasher has 15 flash patterns including random. To change flash patterns momentarily apply +12v to the white, mode wire. Each time +12v is applied, the flash pattern will change.

FLASH PATTERNS

- | | | |
|-------------------------|-------------------------------|---------------------------|
| 1. Quad Alternating | 6. Left Steady/ Right Steady | 11. Double Flash All |
| 2. Single Flash 120 FPM | 7. Single Chase | 12. Quad Flash All |
| 3. Single Flash 240 FPM | 8. HyperFlash All | 13. SuperMEGA - steady |
| 4. Double Chase | 9. Steady Fade | 14. Random Non Sequential |
| 5. 3 Scan - Pause | 10. Single Alternating 90 FPM | 15. Random All |

INSTALLATION INSTRUCTIONS:

Determine location to mount your Luminator LED Stretch Bar. Attach bolts to bottom of your **SHO-ME**® Luminator LED Stretch Bar. Keep in mind airbag deployment area and any other obstacles. Run wire inside of vehicle and connect to switch. A momentary switch is required to change flash patterns.

If mounting this product requires drilling holes, the installer **MUST** be sure that no vehicle components or other vital parts could be damaged by the drilling process. Check both sides of the mounting surface before drilling begins. Also de-burr any holes and remove any metal shards or remnants. Install grommets into all wire passage holes.


Use only soap and water to clean the outer lens. Use of other chemicals could result in premature lens cracking and discoloration. Lenses in this condition have significantly reduced effectiveness. Inspect and operate this product regularly to confirm its proper operation and mounting condition. **Do not use a pressure washer to clean this product.**



PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com



MODEL NO. 12.1257
Permanent Mount
Luminator LED Stretch Bar

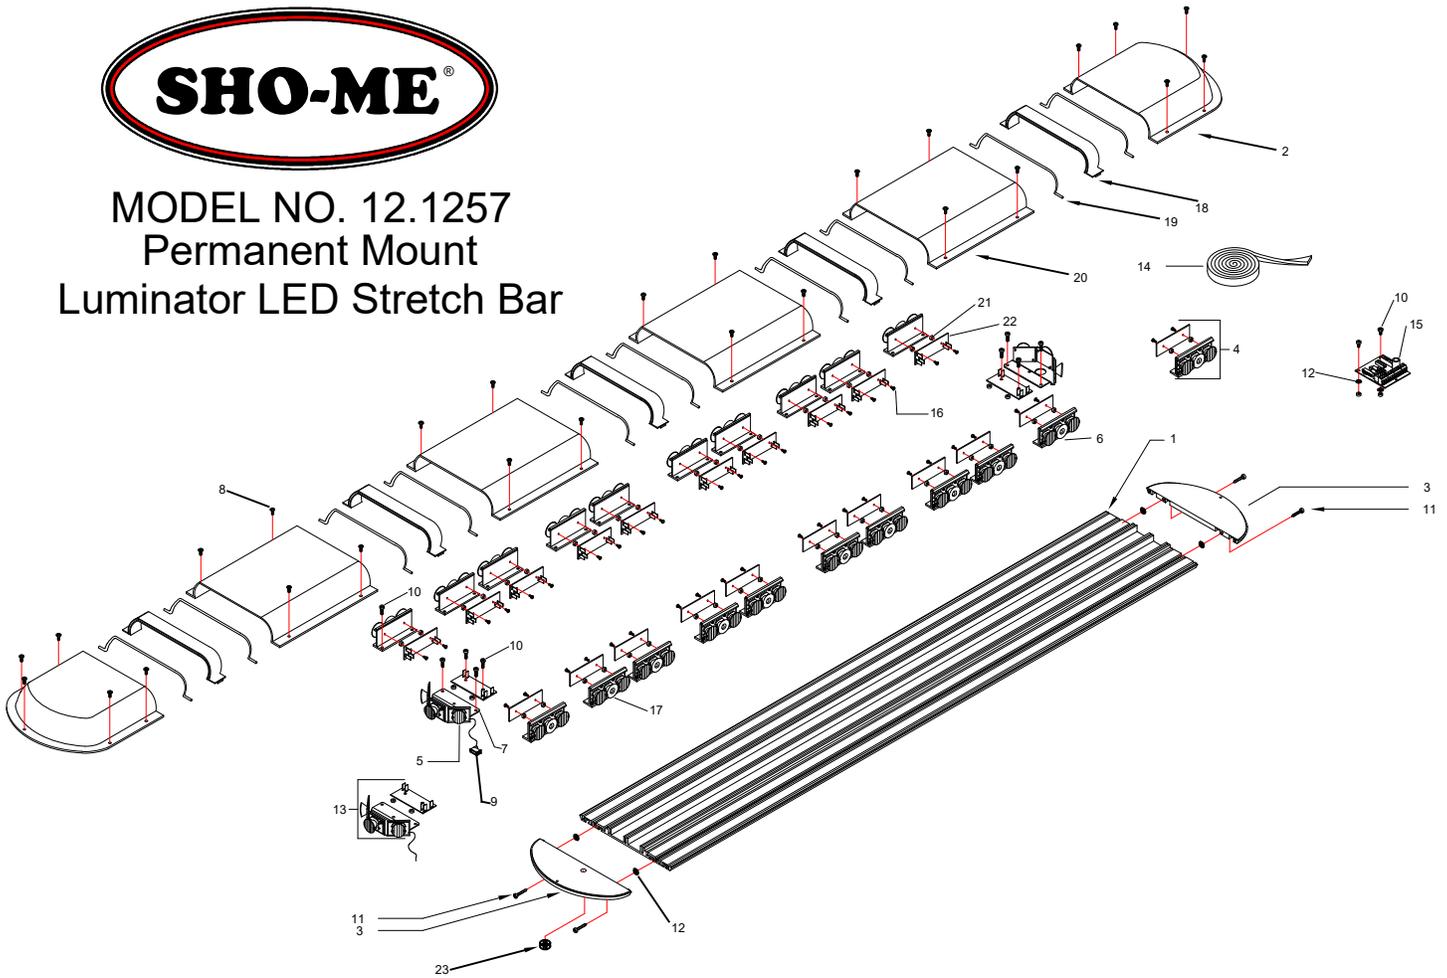

Parts List for 12.1257
Luminator Stretch Bar
Permanent Mount

ITEM	MODEL NO.	DESCRIPTION	QTY
1	90.4986.000	51" Long Extrusion	1
2	90.6137.C00	Clear Lexan End Cover	2
3	90.6125.000	Black Plastic Endcaps	2
4	12.9530.000	Luminator (Amber, Blue,Red,White,Green)	20
5	90.6246.000	Oval Sublens 4x27 Degrees	46
6	90.6245.000	Luminator Lens	66
7	90.4207.000	Alum end bracket for K-2	2
8	90.4002.000	#8 X 1/ 2 812 Self Tapping Screw	26
9	90.3515.000	Flag Term	110
10	90.4720.000	10mm Screw	56
11	90.4021.SS	Endcap Self Tapping Screws	4
12	90.4530.000	#8 External Tooth Lock washer	6
13	12.9540.000	End section Luminator (Amber, Blue, Red, White,Green)	2
14	90.6039.000	1/ 8" X 3/ 4" Black Foam Adhesive 138"	1
15	95.3728.000	Luminator Flasher 8 outputs	1
16	90.4800.SS	4-40 x 1/ 4 PH MS	132
17	90.3977.000	LXK2(Red,Amber,or Blue)LED Light	66
18	90.6138.000	Lens Joiner	5
19	90.6747.000	Rubber Gasket	10
20	90.6136.000	Clear Lexan 10" Middle cover	4
21	90.6966.000	Spacers	46
22	95.5015.000	Driver	22
23	90.6432.000	All fit adjustable bushing	1