



MODEL NO. 30.7102

Speaker Bracket


INSTALLATION INSTRUCTIONS

1998-2009 FORD CROWN VIC

The Model No. 30.7102 Speaker Bracket allows a standard siren speaker driver to be mounted behind the grill of a 1998-2009 Crown Vic without any drilling. The bracket will allow a speaker to mount in a horizontal position for maximum sound performance from the siren.

INSTRUCTIONS:

1. Open Hood.
2. Remove the plastic cover over the radiator.
3. Look into the open area in front of the radiator. Notice the support bracket that attaches the grill header panel to the radiator support bar (next to the drivers side headlight).
4. Remove the 2 bolts from the support bracket.
5. Carefully position the 30.7102 bracket into the open area and attach it to the side of the support bracket using the same 2 bolts. (CAUTION: Be careful not to damage the radiator when positioning the 30.7102 bracket)
6. Bolt the speaker driver to the 30.7102 bracket.
7. Attach the scoop style cone and screw on tip. Adjust the cone toward the grille.

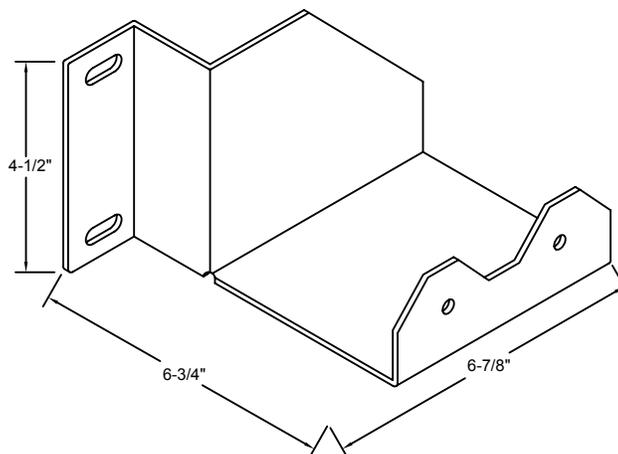

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com

03-12-08